

RG30 Regulator

The RG30 is a compact, spring-operated regulator normally used to supply air or gas to pilots, positioners or other pneumatic controls. It features an internal relief to help maintain an accurate downstream pressure, rugged aluminum housing construction with dual outlets and a built-in micron filter.




Specifications

- Connection: 1/4" NPT
- Temperature Range: -20° F to 180° F (-29° C to 82° C)
- Inlet Pressure Rating: 250 psi
- Output Ranges:
 - 0 – 30 psi
 - 0 – 60 psi
 - 0 – 120 psi
- Body and Housing Material: Die Cast Aluminum

Dimensions

Dimensions in inches (mm).

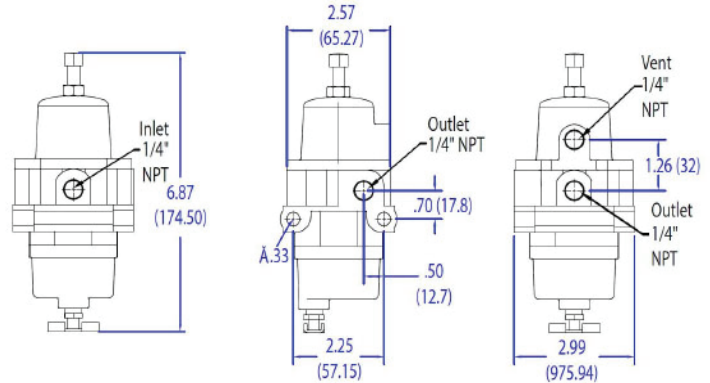

Capacities in SCFH of .6 SG Natural Gas

| Inlet Pressure (psi) | Outlet Pressure Setting (Spring Range) | | |
|----------------------|--|---------------|----------------|
| | 25 psi (0-30) | 40 psi (0-60) | 80 psi (0-120) |
| 50 | 516 | 194 | - |
| 75 | 710 | 645 | - |
| 100 | 968 | 645 | 516 |
| 150 | 1290 | 903 | 839 |
| 250 | 1806 | 1806 | 1290 |

How to Order

| Model Number | Spring Range |
|--------------|--------------|
| RG30-1 | 0-30 psi |
| RG30-2 | 0-60 psi |
| RG30-3 | 0-120 psi |

